1.Function

The Changeover Switch can switch on, load and break the circuit under normal conditions, using as Switch Disconnectors.

2.Nomenclature

BX 9 G - 40 / 1P 63

- 63 — Rated current
- 1P — Poles
- 40 — Frame level
- G — Isolating switch
- 9 — Design code
- BX — Company code

3.Specifications

Type	Standard		IEC/EN 60947-3
Electrical features	Poles	P	1, 2, 3, 4
	Rated voltage Ue	V	240/415V
	Rated current In	A	63
	Rated frequency	Hz	50/60
	Contact form	V	1-0-2
Mechanical features	Electrical life	t	1500
	Mechanical life	t	8500
	Protection grade		IP20
	Ambient temperature (with daily average≤35°C)	°C	-5~+40
Installation	Terminal / cable size	mm²	16
	Mounting		On DIN rail EN60715(35mm) by means of fast clip device

4.Circuit Diagram

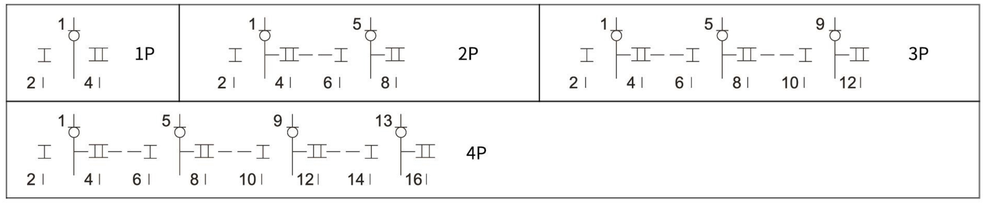

5.Dimensions

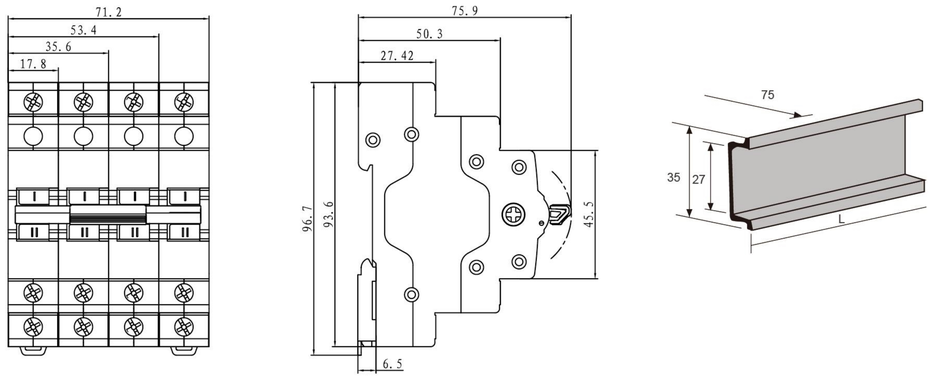

6.Order Note

Following items should be marked when ordering	Ordering sample
Product name, model & frame level Poles Rated current Quantity	To order the BX9G-63 isolating changeover switch, 1P, rated current is 63A, and quantity is 100 pieces, should be marked: BX9G-63/1P 63A, 100 PCS.