M

1.Function

Suitable for industrial, commercial, high-rise and civil residences circuit protection.

- Overload& short circuit protection
- Protect people against indirect contacts and additional protection against direct contacts.
- Protect installations against fire hazard due to insulation faults.
- Control electric circuits

2.Nomenclature

EBS 7BLE - 63 / 4P

- 4P — Poles
- 63 — Frame level
- 7BLE — Design code
- EBS — Company code

3.Specifications

Type	Standard		IEC/EN 61009-1
Electrical features	Poles	P	1P+N, 2P, 3P+N, 4P
	Type(wave form of the earth leakage sensed)		A, AC
	Thermo-magnetic release characteristic		B, C, D
	Rated current In	A	25, 32, 40, 50, 63
	Rated voltage Ue	V	230/400
	Rated sensitivity IΔn	A	0.03, 0.1, 0.3
	Rated residual making and breaking capacity IΔm	A	500(In≤40A) 630(In＞40A)
	Rated short-circuit capacity Icn	A	6000
	Break time under IΔn	s	≤0.1
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)Uimp	V	4000
	Dielectric test voltage at ind.Freq.for 1min	kV	2
	Insulation voltage Ui	V	500
	Pollution degree		2
Mechanical features	Electrical life	t	4000
	Mechanical life	t	10000
	Contact position indicator		Yes
	Protection degree		IP20
	Ambient temperature(with daily average≤35℃)	℃	-5~+40
	Storage temperature	℃	-25~+70
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm²	25
		AWG	18-3
	Terminal size top/bottom for busbar	mm²	25
		AWG	18-3
	Tightening torque	N*m	2
		In-lbs	18
	Mounting		On DIN rail EN60715(35mm)by means of fast clip device
	Connection		From top

M

4.Release

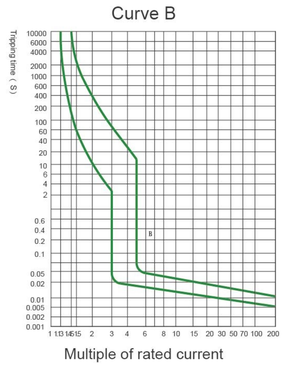

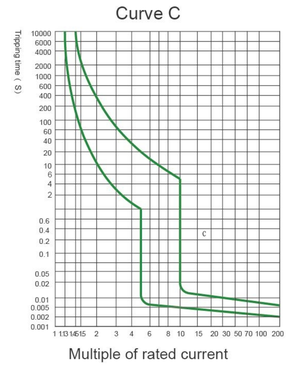

5.Conductor

Copper cross-section(mm²)	Rated current In(A)
1	In≤6
1.5	6<In≤13
2.5	13<In≤20
4	20<In≤25
6	25<In≤32
10	32<In≤50
16	50<In≤63

M

6.Temperature Derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed. The reference temperature is 30℃.

When several simultaneously operating circuit breakers are mounted side by side in a small enclosure,the temperature rise inside the enclosure causes a reduction in current rating.
You must then assign the rating (already derated if necessary according to ambient temperature), a downrating factor of 0.8.

Rated current	-35℃	-30℃	-20℃	-10℃	0℃	10℃	20℃	30℃	40℃	50℃	60℃	70℃
1	1.30	1.26	1.23	1.19	1.15	1.11	1.05	1.00	0.96	0.93	0.88	0.83
2	2.60	2.52	2.46	2.38	2.28	2.20	2.08	2.00	1.92	1.86	1.76	1.66
3	3.90	3.78	3.69	3.57	3.42	3.30	3.12	3.00	2.88	2.79	2.64	2.49
4	5.20	5.04	4.92	4.76	4.56	4.40	4.16	4.00	3.84	3.76	3.52	3.32
6	7.80	7.56	7.38	7.14	6.84	6.60	6.24	6.00	5.76	5.64	5.28	4.98
10	13.20	12.70	12.50	12.00	11.50	11.10	10.60	10.00	9.60	9.30	8.90	8.40
16	21.12	20.48	20.00	19.20	18.40	17.76	16.96	16.00	15.36	14.88	14.24	13.44
20	26.40	25.60	25.00	24.00	23.00	22.20	21.20	20.00	19.02	18.60	17.80	16.80
25	33.00	32.00	31.25	30.00	28.75	27.75	26.50	25.00	24.00	23.25	22.25	21.00
32	42.56	41.28	40.00	38.72	32.12	35.52	33.92	32.00	30.72	29.76	28.16	26.88
40	53.20	51.20	50.00	48.00	46.40	44.80	42.40	40.00	38.40	37.20	35.60	33.60
50	67.00	65.50	63.00	60.50	58.00	56.00	53.00	50.00	48.00	46.50	44.00	41.50
63	83.79	81.90	80.01	76.86	73.71	70.56	66.78	63.00	60.48	58.90	55.44	52.29

7.Order Note

Following items should be marked when ordering	Ordering sample
Product name, model & frame level Poles Tripping characteristic and rated current Quantity	To order EBS7BLE residual current circuit breaker, frame level 63A, 4P, rated current 63A, rated residual current is 30mA, quantity 100 pieces, should be marked: RCBO EBS7BLE/4PC63/30mA, 100 PCS.